

# 4K60 HDMI™ over Fiber Extender



User Manual

VER 1.0

# Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

## Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

## Table of Contents

1. Introduction.....	1
2. Features.....	1
3. Package Contents.....	2
4. Specifications.....	2
5. Operation Controls and Functions.....	3
5.1 Transmitter Panel.....	3
5.2 Receiver Panel.....	4
6. Application Example.....	5

## 1. Introduction

This HDMI extender can extend HDMI signal up to 10km (over a single-mode fiber cable). Video resolution up to 4K2K@50/60Hz RGB 4:4:4. This product has the advantages of strong anti-interference, high safety performance, small size and light weight, and has incomparable advantages in long-distance transmission.

## 2. Features

- ☆ HDCP 2.2 compliant
- ☆ Support 18Gbps video bandwidth
- ☆ Video resolution up to 4K2K@50/60Hz 4:4:4, as specified in HDMI 2.0b
- ☆ Support any VESA resolution
- ☆ HDR10, HDR10+, Dolby Vision, HLG pass-through
- ☆ Support LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio
- ☆ Transmission distance up to 10km (over a single-mode fiber cable)
  - \* Multi-mode fiber is supported in SFP modules. The distance over OM4 is up to 300m
- ☆ Compact design for easy and flexible installation

## 3. Package Contents

- ① 1× 4K60 HDMI over Fiber Extender (Transmitter)
- ② 1× 4K60 HDMI over Fiber Extender (Receiver)
- ③ 2× 5V/1A Power Supply
- ④ 1× User Manual



## 4. Specifications

Technical	
HDMI Compliance	HDMI 2.0b
HDCP Compliance	HDCP 2.2
Video Bandwidth	18Gbps
Input & Output Video Resolution	4096x2160p60, 4096x2160p50, 3840x2160p60, 3840x2160p50, 3840x2160p30, 3840x2160p25, 1920x1200p60RB, 1920x1080p60, 1920x1080p50, 1360x768p60, 1280x800p60, 1280x720p60, 1280x720p50, 1024x768p60 Any VESA resolution is supported.
Color Space	RGB, YCbCr 4:4:4 / 4:2:2, YUV 4:2:0
Color Depth	8-bit, 10-bit, 12-bit
HDMI Audio Formats	LPCM, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DTS:X
HDR	HDR10, HDR10+, Dolby Vision, HLG
Fiber Optic	10G SFP+ module
Transmission Distance	Up to 10km over single-mode fiber cable At least 300m over multi-mode OM4 fiber cable
ESD Protection	IEC 61000-4-2: ±8kV (Air-gap discharge) & ±4kV (Contact discharge)
Connection	
Transmitter	Input: 1x IN [HDMI Type A, 19-pin female] 1x SERVICE [USB-C, update port] Output: 1x SFP+ OUT [LC female]
Receiver	Input: 1x SFP+ IN [LC female] 1x SERVICE [USB-C, update port] Output: 1x OUT [HDMI Type A, 19-pin female]

Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions	Transmitter / Receiver: 81mm [W] x 49mm [D] x 25mm [H]
Weight	Transmitter: 138g, Receiver: 138g
Power Supply	Input: AC 100 - 240V 50/60Hz Output: DC 5V/1A (US/EU standards, CE/FCC/UL certified)
Power Consumption	Transmitter: 3.05W (Max), Receiver: 2.25W (Max)
Operating Temperature	32°F - 104°F / 0°C - 40°C
Storage Temperature	-4°F - 140°F / -20°C - 60°C
Operating Humidity	20% - 80% (relative humidity, non-condensing)
Storage Humidity	10% - 90% (relative humidity, non-condensing)

## 5. Operation Controls and Functions



### 5.1 Transmitter Panel

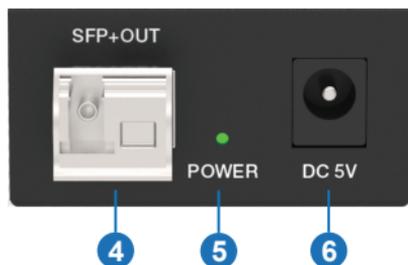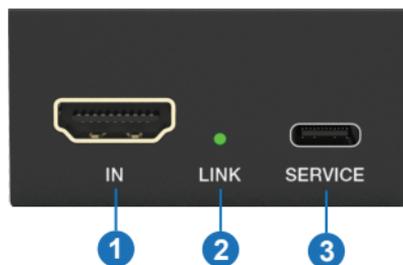

No.	Name	Function Description
1	IN	HDMI signal input port, connected to HDMI source device such as DVD or PC with an HDMI cable.


No.	Name	Function Description
2	LINK indicator	The green LED is always on when the Transmitter and Receiver have a connection with normal optical fiber signal.
3	SERVICE port	Used for firmware update.
4	SFP+OUT	Fiber optic SFP port, connected to the SFP+IN port on Receiver via fiber optic cable.
5	POWER indicator	The green LED is always on when the Transmitter is powered on.
6	DC 5V	DC 5V/1A power input port.

## 5.2 Receiver Panel

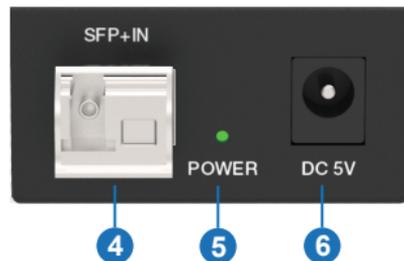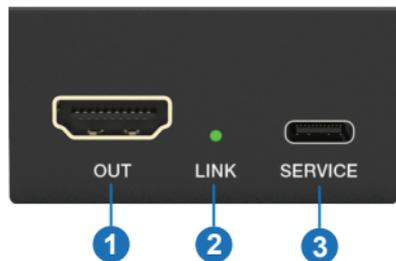

No.	Name	Function Description
1	OUT	HDMI signal output port, connected to a display device such as TV or monitor with HDMI cable.
2	LINK indicator	The green LED is always on when the Transmitter and Receiver have a connection with normal optical fiber signal.
3	SERVICE port	Used for firmware update.
4	SFP+IN	Fiber optic SFP port, connected to the SFP+OUT port on Transmitter via fiber optic cable.
5	POWER indicator	The green LED is always on when the Receiver is powered on.
6	DC 5V	DC 5V/1A power input port.

## 6. Application Example

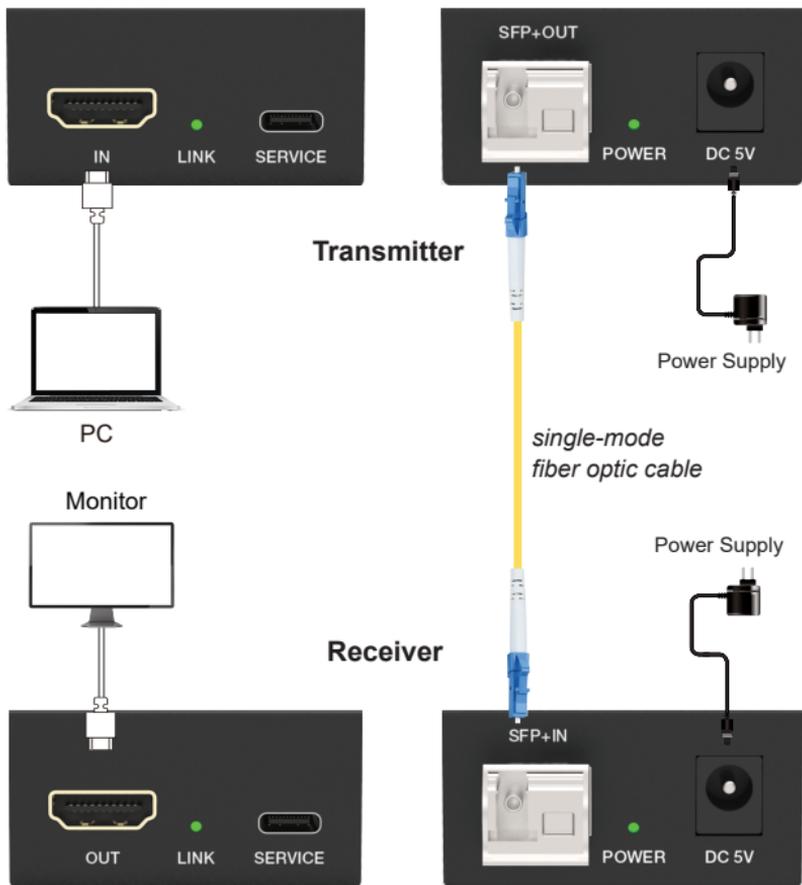

**HDMI**<sup>™</sup>  
HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.